



Application

- Machine condition monitoring to ISO 20816-
- General vibration measurement in laboratory and industry
- Quality control

Properties

- Measurement of vibration acceleration, velocity and displacement
- True RMS, peak value and crest factor
- Precision shear type accelerometer with magnetic base
- Automatic detection of measuring points via the sensor base with electronic VMID measuring points
- Graphical trend display
- Memory for 16000 measurements
- USB interface
- PC software for measuring point management to MIMOSA convention (ISO 13373-1) and measuring data archiving
- Brilliant, power-saving colored OLED display
- Economic AAA batteries or accumulators
- Pocket-sized

Technical Data

Measurement functions

Measurands	Vibration acceleration	
	Vibration velocity/severity	
	Vibration displacement	
Overall values	True RMS value	
	True pak value	
Measuring range acceleration	0.1 to 240	m/s ²
Measuring range velocity	0.1 to 1000	mm/s
Measuring range displacement	0.01 to 60000	µm
Accuracy	±5 (±2 digits)	%
Analog-to-digital converter	24 bit	
Vibration trend	Graphical history of the saved vibration values	
Lower frequency limit acceleration	0,1; 0,2; 3; 1000	Hz
Lower frequency limit velocity	2; 10	Hz
Upper frequency limit acceleration	1000; 10000	Hz
Upper frequency limit velocity	1000	Hz
Upper frequency limit displacement	200	Hz
Indication	OLED; RGB; 128 x 160 pixels	

Connectors

Input channels	1	
Input signals	Low power IEPE	
Input connector	Socket Binder 711; 3 pins	
IEPE constant current	1.9 to 2.9	mA
Digital interfaces	USB 2.0 FS; CGC mode; ASCII command set; Binder 712; 8 poles	

Power Supply

Battery	3 x LR03 / HR03 / AAA	
Battery operating time	8 to 12	h
External supply voltage	5 (USB)	VDC

Case Data

Dimensions without connectors	125 x 65 x 27 (H x W x D)	mm
Case material	ABS	
Weight	140 (without sensor)	g
Operating temperature range	-20 to 60 (95 % rel. humidity without condensation)	°C

Scope of delivery


Accelerometer KS82L with spiral cable
 USB cable
 VMID measuring point sample
 Carrying case

Optional accessories

VMID measuring points
 sensor probe VM2x-T
 PC software VM2x Measurement Data Base

Notice

Upon request, we offer an accredited calibration to DIN EN ISO/IEC 17025:2018.

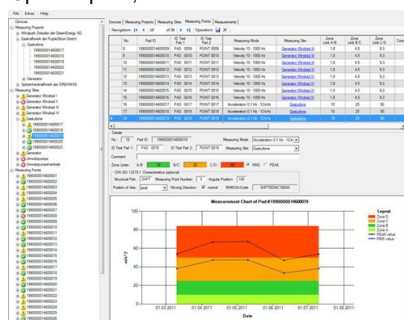

Metra Meß- und Frequenztechnik Radebeul GmbH & Co. KG

Meißner Str. 58a
 01445 Radebeul
 Tel. +49 (0)351 836 2191

Internet: www.MMF.de
 Email: Info@MMF.de
 Fax: +49 (0)351 836 2940

12.25

